




Data Sheet



Product Category: SMD Quartz Crystal

Series Number	Package	Description	Last Modified
266	5x3.2mm Chip Type	SMD Quartz Crystal	Jan. 01 2007

FEATURES

- 5x3.2mm Chip Type quartz crystal
- Low profile
- Tight stability / High reliability
- Cost Efficient
- Tape and Reel
- RoHS / Lead Free compliant




OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS		CHARACTERISTICS	UNITS
Frequency Range	fo	12.00 ~ 40.00	MHz
Frequency Tolerance	@ 25°C	±30	ppm
Frequency Stability	Ta = -20 +70°C	±50	ppm
Operating Temperature	TOPR	-20 ~ +70	°C
Storage Temperature	TSTG	-40 ~ +85	°C
Shunt Capacitance	Co	7.0 max.	pF
Load Capacitance	CL (Customer Specified)	18 ~ 30, Series	pF

EQUIVALENT SERIES RESISTANCE / MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE	MAX ESR Ohm
12.000 ~ 14.399	Fundamental	80
14.400 ~ 40.000	Fundamental	50

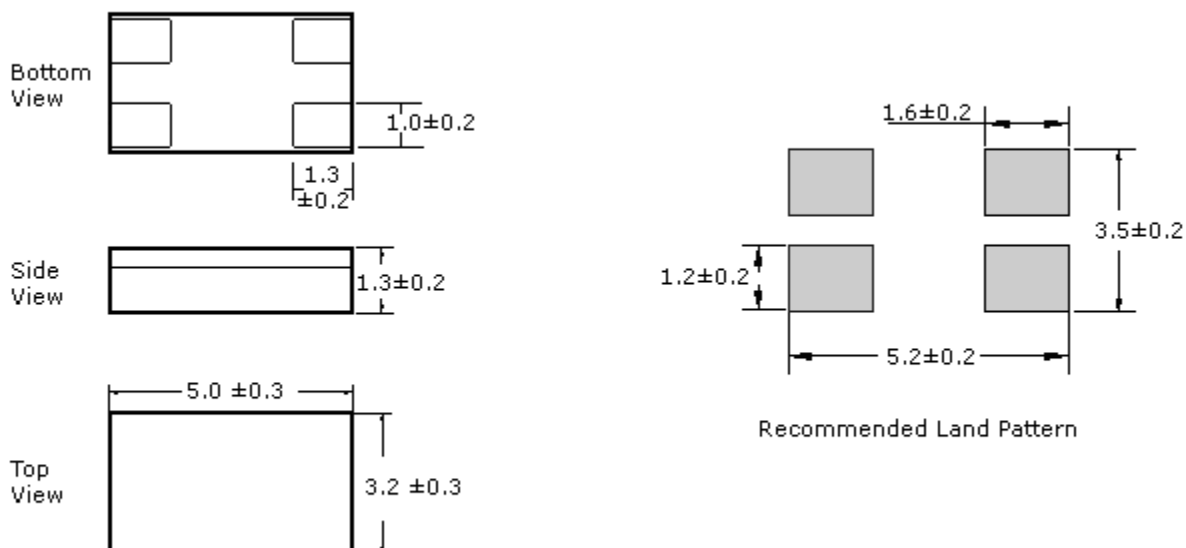PACKAGE DIMENSIONS (mm)**PART NUMBER GUIDE**

Series Number	Frequency	Load Capacitance	Operating Temp (°C)	Packaging**
266	- 12.0M	- 20	- S	- TR
Oscilent 7 x5 2 Pad Quartz Crystal	Enter frequency e.g. 12.0M for 12.000 MHz	Enter capacitance e.g. -20 for 20pF . Enter -SR for Series Resonance.	S = -20~+70	Blank* = Bulk TR = Tape/Reel
<p>NOTE: Deviations on all parameters available. Please consult Oscilent for details.</p> <p>DEFINITIONS: Click on the characteristic names above for definitions of that particular characteristic.</p> <p>*STANDARDS: "Blank" part number selections indicate standard variables for that particular characteristic.</p> <p>**PACKAGING: Click on the packaging name above for tape/reel specifications</p>				

Oscilent Corporation - CALL **949.252.0522**

Series No.: 266

18195 East McDermott Street . Building D . Irvine . CA 92614 . USA
 Fax: 949.252.0599 . E-Mail: Sales@Oscilent.com